

# MV-CS060-10GM/GC V5

6 MP 1/1.8" CMOS GigE Area Scan Camera



**GEN*i*CAM**

**GigE**  
VISION


## Introduction

With GigE interface, MV-CS060-10GM/GC V5 camera adopts Sony® IMX178 sensor to provide high-quality images and transmit images in real time, and its max. frame rate can reach 19.5 fps in full resolution.

## Key Feature

- Adopts brand new design to reduce power consumption.
- Supports auto or manual adjustment of gain, exposure time, LUT, and Gamma correction, etc.
- Supports CCM function to provide high-quality images.
- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Compact design with mounting holes on panels for flexible mounting from 4 sides.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard.

## Dimension

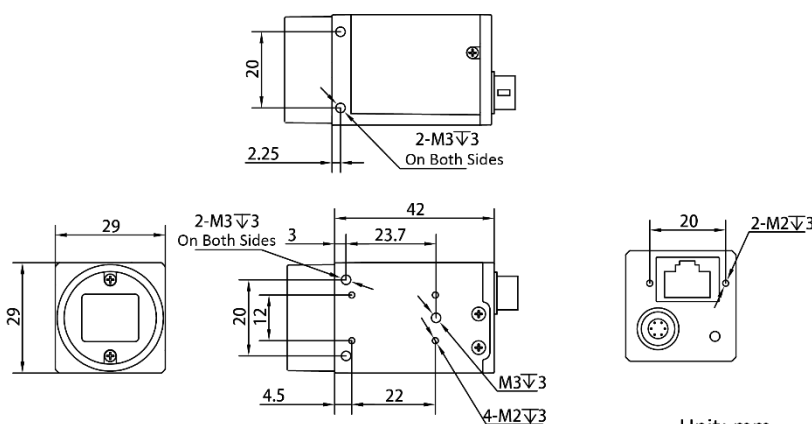


## Available Model

- Mono camera: MV-CS060-10GM V5
- Color camera: MV-CS060-10GC V5


## Applicable Industry

Electronic semiconductor, factory automation, food and beverage, pharmaceutical packaging, etc.

## Sensor Quantum Efficiency

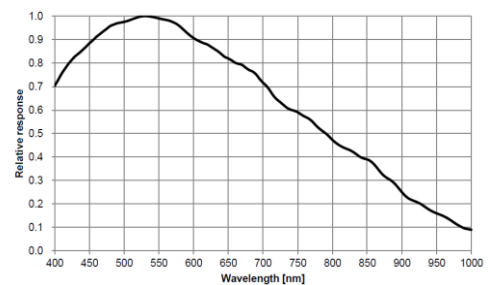

MV-CS060-10GM V5

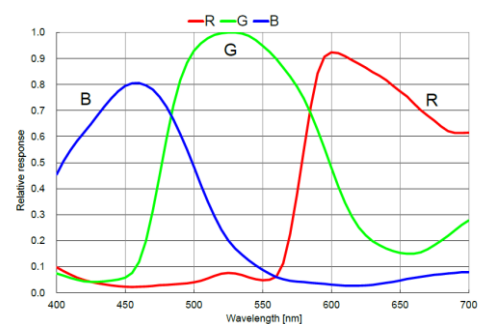

MV-CS060-10GC V5

## Specification

| Model                     | MV-CS060-10GM V5  | MV-CS060-10GC V5  |
|---------------------------|---|---|
| <b>Performance</b>        |   |   |
| Sensor type               | CMOS, rolling shutter   |   |
| Sensor model              | Sony® IMX178  |   |
| Pixel size                | 2.4 μm × 2.4 μm   |   |
| Sensor size               | 1/1.8"  |   |
| Resolution                | 3072 × 2048   |   |
| Max. frame rate           | 19.5 fps @ 3072 × 2048 Mono 8   | 19.5 fps @ 3072 × 2048 Bayer RG 8   |
| Dynamic range             | 71.3 dB   |   |
| SNR                       | 41.3 dB   |   |
| Gain                      | 0 dB to 24 dB   |   |
| Exposure time             | 25 μs to 2.5 sec  |   |
| Exposure mode             | Off/Once/Continuous exposure mode, and supports Global Reset  |   |
| Mono/color                | Mono  | Color   |
| Pixel format              | Mono 8/10/10Packed/12/12Packed  | Mono 8,<br>Bayer RG 8/10/10Packed/12/12Packed,<br>YUV422Packed, YUV422_YUYV_Packed,<br>RGB 8, BGR 8 |
| Binning                   | Supports 1 × 1, 2 × 2, 4 × 4  |   |
| Decimation                | Supports 1 × 1, 2 × 2, 4 × 4  |   |
| Reverse image             | Supports horizontal and vertical reverse image output   |   |
| <b>Electrical feature</b> |   |   |
| Data interface            | Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)  |   |
| Digital I/O               | 6-pin P7 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2). |   |
| Power supply              | 9 VDC to 24 VDC, supports PoE   |   |
| Power consumption         | Typ. 1.4 W @ 12 VDC   |   |
| <b>Mechanical</b>         |   |   |
| Lens mount                | C-mount   |   |
| Dimension                 | 29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.2")  |   |
| Weight                    | Approx. 100 g (0.22 lb.)  |   |
| Ingress protection        | IP40 (under proper lens installation and wiring)  |   |
| Temperature               | Working temperature: -30 °C to 60 °C (-22 °F to 140 °F)<br>Storage temperature: -30 °C to 80 °C (-22 °F to 176 °F)  |   |
| Humidity                  | 20% RH to 95% RH (no condensation)  |   |
| <b>General</b>            |   |   |
| Client software           | MVS or third-party software meeting with GigE Vision Protocol   |   |
| Operating system          | 32/64-bit Windows 7/10, 64-bit Windows 11, and 32/64-bit Linux  |   |
| Compatibility             | GigE Vision V2.0, GenICam   |   |
| Certification             | CE, RoHS, KC  |   |